



supamag[®] : VINYL FACED MAGNETIC SHEET

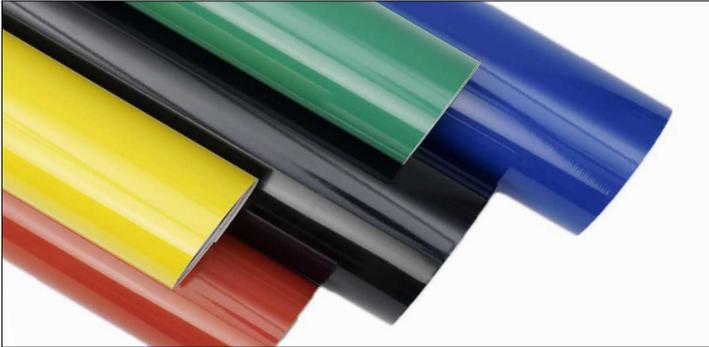

Digitally printable in various widths & thicknesses

- Manufacturing process: both calendered, then laminated together
- Material composition: 90% high grade ferrite powder, 10% synthetic binder, free of PVC & phthalates, laminated to self-adhesive PVC vinyl
- Adhesive: N/A
- Magnetisation: one face only, UV coated
- Pole pitch: 1.5mm to 2.5mm (travelling down the length of the roll)
- Density: 3.6g/cm³
- Colour: multiple choices in matt & gloss
- Hardness: (Shore-D) 33±5
- Working Face: opposite the vinyl face
- Magnetic stability: immune to magnetic damage in normal use
- Working temperature: -20°C to 80°C above which, performance will reduce
- Storage temperature: between 10°C and 40°C
- Compliance: **supamag[®]** sheet conforms to European Toy safety standard, EN71, part 3. REACH & RoHS approved
- Packaging: will be supplied in cartons, cut sheets will be in cartons or on pallets



MORE INFORMATION

www.anchormagnets.com/pages/supamag-superior-magnetic-sheet

Disclaimer:

Published technical information concerning our products is based upon research, which, to the best of our company's knowledge & belief, is accurate & reliable.

Whilst the guidelines above will assist the purchaser in considering the suitability & performance of the product for each intended use, it remains the user's responsibility to satisfy themselves as to the suitability of such information for each particular use.

Therefore, Anchor Magnets Ltd & Anchor Magnets Europe, accepts no liability in the event of improper use or processing beyond our guidelines.